


PSL-D

规格

型号	最大容许扭矩 [N·m]	最大容许轴向推力 [N]	轴侧面压力 [N/mm ²]	毂侧面压力 [N/mm ²]	螺栓拧紧扭矩 [N·m]	惯量 [kg·m ²]	质量 [kg]	价格
PSL-D-6	6	2100	150	60	1	0.48×10^{-6}	0.012	—
PSL-D-7	8	2100	140	60	1	0.52×10^{-6}	0.013	—
PSL-D-8	10	2600	110	50	1	0.77×10^{-6}	0.015	—
PSL-D-9	15	3200	130	60	1	1.1×10^{-6}	0.020	—
PSL-D-10	16	3200	110	60	1	1.2×10^{-6}	0.019	—
PSL-D-11	17	3200	100	50	1	1.8×10^{-6}	0.024	—
PSL-D-12	19	3200	100	50	1	1.7×10^{-6}	0.022	—
PSL-D-14	34	4800	100	50	2	4.3×10^{-6}	0.039	—
PSL-D-15	36	4800	90	50	2	5.7×10^{-6}	0.044	—
PSL-D-16	67	8400	130	60	4	10×10^{-6}	0.068	—
PSL-D-17	70	8400	120	60	4	18×10^{-6}	0.093	—
PSL-D-18	75	8400	110	60	4	17×10^{-6}	0.090	—
PSL-D-19	80	8400	110	60	4	16×10^{-6}	0.085	—
PSL-D-20	140	13600	150	80	8	24×10^{-6}	0.120	—
PSL-D-22	150	13600	140	80	8	29×10^{-6}	0.130	—
PSL-D-24	230	19300	150	80	14	70×10^{-6}	0.220	—
PSL-D-25	240	19300	140	80	14	69×10^{-6}	0.210	—
PSL-D-28	400	28900	190	110	14	86×10^{-6}	0.240	—
PSL-D-30	430	28900	180	100	14	128×10^{-6}	0.270	—
PSL-D-32	460	28900	170	100	14	123×10^{-6}	0.260	—
PSL-D-35	670	38600	160	90	14	215×10^{-6}	0.370	—
PSL-D-38	730	38600	150	90	14	298×10^{-6}	0.420	—
PSL-D-40	770	38600	140	90	14	286×10^{-6}	0.410	—
PSL-D-42	1110	52700	150	80	34	682×10^{-6}	0.700	—
PSL-D-45	1200	52700	140	80	34	609×10^{-6}	0.630	—
PSL-D-48	1690	70300	190	110	34	769×10^{-6}	0.730	—
PSL-D-50	1760	70300	180	110	34	742×10^{-6}	0.710	—

尺寸

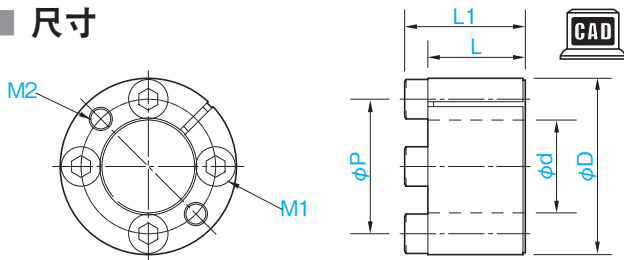

订购时

PSL - D -
大小
旧型号 ETP - D -

单位 [mm]


型号	d	D	P	L	L1	M1	M2	CAD 文档 No.
PSL-D-6	6	16	11	11	13.5	3-M2.5×10	2-M2.5	—
PSL-D-7	7	17	12	11	13.5	3-M2.5×10	2-M2.5	—
PSL-D-8	8	18	13	11	13.5	3-M2.5×10	2-M2.5	—
PSL-D-9	9	20	15	13	15.5	4-M2.5×12	2-M2.5	—
PSL-D-10	10	20	15	13	15.5	4-M2.5×12	2-M2.5	—
PSL-D-11	11	22	17	13	15.5	4-M2.5×12	2-M2.5	—
PSL-D-12	12	22	17	13	15.5	4-M2.5×12	2-M2.5	—
PSL-D-14	14	26	20	17	20	4-M3×16	2-M3	—
PSL-D-15	15	28	21.5	17	20	4-M3×16	2-M3	—
PSL-D-16	16	32	24	17	21	4-M4×16	2-M4	—
PSL-D-17	17	35	27	21	25	4-M4×20	2-M4	—
PSL-D-18	18	35	27	21	25	4-M4×20	2-M4	—
PSL-D-19	19	35	27	21	25	4-M4×20	2-M4	—
PSL-D-20	20	38	29	21	26	4-M5×20	2-M5	—
PSL-D-22	22	40	31	21	26	4-M5×20	2-M5	—
PSL-D-24	24	47	36	26	32	4-M6×25	2-M6	—
PSL-D-25	25	47	36	26	32	4-M6×25	2-M6	—
PSL-D-28	28	50	39	26	32	6-M6×25	2-M6	—
PSL-D-30	30	55	43.5	26	32	6-M6×25	2-M6	—
PSL-D-32	32	55	43.5	26	32	6-M6×25	2-M6	—
PSL-D-35	35	60	47.5	31	37	8-M6×30	2-M6	—
PSL-D-38	38	65	52.5	31	37	8-M6×30	2-M6	—
PSL-D-40	40	65	52.5	31	37	8-M6×30	2-M6	—
PSL-D-42	42	75	60	36	44	6-M8×35	2-M8	—
PSL-D-45	45	75	60	36	44	6-M8×35	2-M8	—
PSL-D-48	48	80	65	36	44	8-M8×35	2-M8	—
PSL-D-50	50	80	65	36	44	8-M8×35	2-M8	—

PSL-D-C

规格

型号	最大容许扭矩 [N·m]	最大容许轴向推力 [N]	轴侧面压力 [N/mm ²]	毂侧面压力 [N/mm ²]	螺栓拧紧扭矩 [N·m]	惯量 [kg·m ²]	质量 [kg]	价格
PSL-D-16-C	67	8400	130	60	4	10×10 ⁻⁶	0.068	—
PSL-D-17-C	70	8400	120	60	4	18×10 ⁻⁶	0.093	—
PSL-D-18-C	75	8400	110	60	4	17×10 ⁻⁶	0.090	—
PSL-D-19-C	80	8400	110	60	4	16×10 ⁻⁶	0.085	—
PSL-D-20-C	140	13600	150	80	8	24×10 ⁻⁶	0.120	—
PSL-D-22-C	150	13600	140	80	8	29×10 ⁻⁶	0.130	—
PSL-D-24-C	230	19300	150	80	14	70×10 ⁻⁶	0.220	—
PSL-D-25-C	240	19300	140	80	14	69×10 ⁻⁶	0.210	—
PSL-D-28-C	400	28900	190	110	14	86×10 ⁻⁶	0.240	—
PSL-D-30-C	430	28900	180	100	14	128×10 ⁻⁶	0.270	—
PSL-D-32-C	460	28900	170	100	14	123×10 ⁻⁶	0.260	—
PSL-D-35-C	670	38600	160	90	14	215×10 ⁻⁶	0.370	—
PSL-D-38-C	730	38600	150	90	14	298×10 ⁻⁶	0.420	—
PSL-D-40-C	770	38600	140	90	14	286×10 ⁻⁶	0.410	—
PSL-D-42-C	1110	52700	180	110	34	682×10 ⁻⁶	0.700	—
PSL-D-45-C	1200	52700	140	80	34	609×10 ⁻⁶	0.630	—
PSL-D-48-C	1690	70300	190	110	34	769×10 ⁻⁶	0.730	—
PSL-D-50-C	1760	70300	180	110	34	742×10 ⁻⁶	0.710	—

尺寸

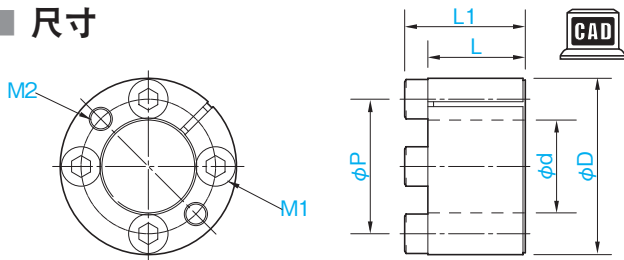

订购时

PSL - D - - C
 大小
 类型 (C: 简易防锈处理)
 旧型号 ETP - D - - C

单位 [mm]

型号	d	D	P	L	L1	M1	M2	CAD 文档 No.
PSL-D-16-C	16	32	24	17	21	4-M4×16	2-M4	—
PSL-D-17-C	17	35	27	21	25	4-M4×20	2-M4	—
PSL-D-18-C	18	35	27	21	25	4-M4×20	2-M4	—
PSL-D-19-C	19	35	27	21	25	4-M4×20	2-M4	—
PSL-D-20-C	20	38	29	21	26	4-M5×20	2-M5	—
PSL-D-22-C	22	40	31	21	26	4-M5×20	2-M5	—
PSL-D-24-C	24	47	36	26	32	4-M6×25	2-M6	—
PSL-D-25-C	25	47	36	26	32	4-M6×25	2-M6	—
PSL-D-28-C	28	50	39	26	32	6-M6×25	2-M6	—
PSL-D-30-C	30	55	43.5	26	32	6-M6×25	2-M6	—
PSL-D-32-C	32	55	43.5	26	32	6-M6×25	2-M6	—
PSL-D-35-C	35	60	47.5	31	37	8-M6×30	2-M6	—
PSL-D-38-C	38	65	52.5	31	37	8-M6×30	2-M6	—
PSL-D-40-C	40	65	52.5	31	37	8-M6×30	2-M6	—
PSL-D-42-C	42	75	60	36	44	6-M8×35	2-M8	—
PSL-D-45-C	45	75	60	36	44	6-M8×35	2-M8	—
PSL-D-48-C	48	80	65	36	44	8-M8×35	2-M8	—
PSL-D-50-C	50	80	65	36	44	8-M8×35	2-M8	—